



Definition: All metal self-locking nut with nylon insert.


Dimensions : HUP Nut : to standard NF EN ISO 7040 (NFE 25409).

HMP Nut : to standard NF EN ISO 10511 (NFE 25412).

Threading: to standard NF ISO 262 (NFE 03014) and NF ISO 956-2 (NFE 03053).

Characteristic and performance test: NF EN ISO 2320 (NFE 25408),
NFE 25035 and NF EN ISO 3506-2.

Manufacture : From diameter M3 to M24. For diameter < M3 ask for the specific catalogue.

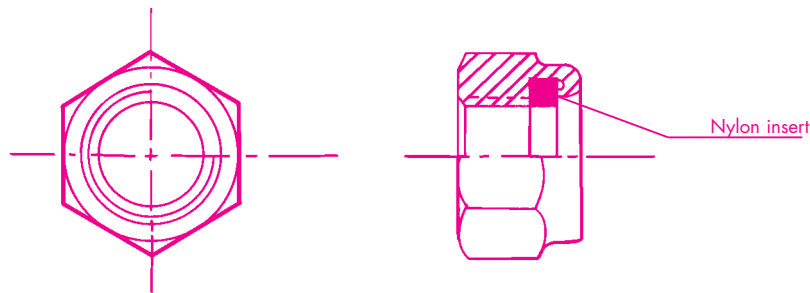

Quality class	Classification	Range of application
Steel class 8/ grade 5	QV	
Steel class 10 / grade 8	QK	
Stainless steel A2-70	ZE	-40°C +120°C ⁽¹⁾
Stainless steel A4-70	SH	
Stainless steel A4-8	ZH	

⁽¹⁾ Only an indication.

Surface treatment

Galvanizing NF EN ISO 4042 (NFE 25009)	White ZO - Yellow ZJ - Green Oliva ZV
Phosphatizing	TO
Antigalling standard to the NFE 25 035 : Stanal 400	ST
Sherardisation	SH
Self color	BT

Example of ordering code	HUP	080125	ZE	BT	00	Classification Wording
	Nut with nylon insert	M 8 x 125	A2 70	self color	*	

* Standard size.

On request: are available different materials, plating finishes and other sizes.