


QC-Plugs GPN 245

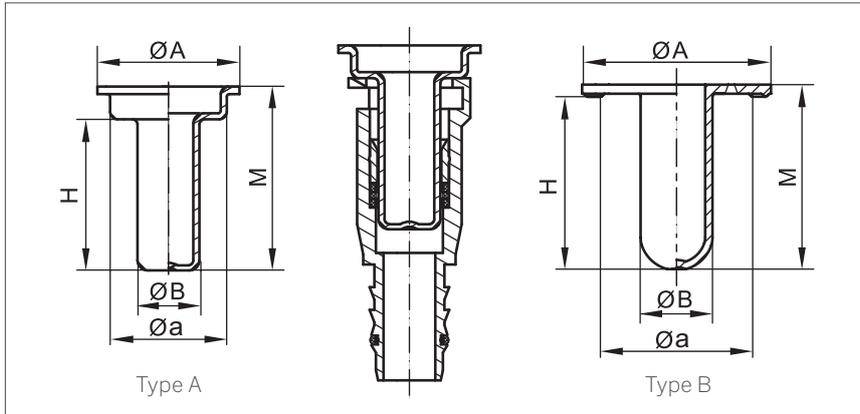

Type A

Type	Suitable for SAE couplings		Dimensions					Order no.
	nominal size mm	nominal size Zoll	A	a	B	H	M	
B	6,35	1/4	31,6	28,6	6,35	25,3	26,8	245 QCL 6,35
A	8	5/16	26,0	22,0	7,6	27,0	33,0	245 QC 8
B	9,5	3/8	30,8	24,8	9,5	25,8	27,3	245 QCL 9,5
A	10	7/16	23,0	18,0	9,6	30,0	34,0	245 QC 10
B	12		38,0	32,0	11,8	29,2	30,7	245 QCL 12
A	12,7	1/2	28,0	23,0	12,2	30,0	36,5	245 QC 12,7
A	14,24		32,0	28,0	13,4	28,0	34,5	245 QC 14,24
A	15,9		34,0	30,0	15,7	35,0	43,0	245 QC 15,9

Size in mm

Additional dimensions, heat-resistant types and bespoke designs available on request.



Type B

Your KAPSTO® quality benefits:



Standard protection:

Suitable for SAE quick connectors in accordance with SAE J2044.



Leak Proof: Suitable for limited pressure testing.



Additional information:

Clamping is carried out gently and safely on the internal sealing rings of the connector.

Material Type A:

Polyethylene (PE-HD)

Material Type B:

Polyethylene (PE-LD)

Colour:

Natural